

ARTICULATION BOOM LIFT

SPECIFICATIONS

MODELS	AR60J-H	
Measurements	Metric	Imperial
Work Height Max.	20.46m	67'2"
Platform Height Max.	18.46m	60'7"
Horizontal Outreach	11.92m	39'1"
Up and Over Height	8.32m	27'4"
Platform Length	2.44m	8'
Platform Width	0.9m	2'11"
A Stowed Length	9.09m	29'10"
Transport Length (jib tucked)	7.4m	24'3"
B Overall Width	2.49m	8'2"
C Stowed Height	2.5m	8'2"
Transport Height	2.85m	9'4"
D Wheelbase	2.44m	8'
E Ground Clearance	0.36m	1'2"

PRODUCTIVITY		
Platform Capacity (unrestricted)	300kg	660 lbs
Platform Capacity (restricted)	454kg	1000 lbs
Max. Platform Occupancy	2(unrestricted)/3(restricted)	
Turntable Rotation	360°	
Drive Speed-Stowed	6.4km/h	4mph
Drive Speed-Raised	1.1km/h	0.7mph
Gradeability	45%	
Max. Wind Speed	12.5m/s	28mph
Turning Radius-Inside	2.38m	7'10"
Turning Radius-Outside	5.37m	17'7"
Max. Slope	5°/5°	
Tire Type	Foam-filled	
Tire Models	355/55D 625	
Ground Pressure, Tyres	683 kPa	99.1 psi

POWER		
Power Source	Kubota 36kW/48.3hp	
Fuel Tank Capacity	100L	26.4gal

HYDRAULIC SYSTEM		
Hydraulic Oil Volume	95L	25.1gal

WEIGHT		
Machine Weight	11,300kg	24,912 lbs



STANDARD FEATURES

Auto-leveling platform	Descent alarm
Hydraulic rotating platform 180°	Flashing beacons
Full proportional joystick control	Horn/Hour meter
Intelligent self-diagnosis function	Dustproof components
Over-tilt protection system	AC power to platform
Emergency stop button	Platform tool box

OPTIONAL

Platform work light
Half-height mesh platform
Platform storage rack

MACHINE SIZE

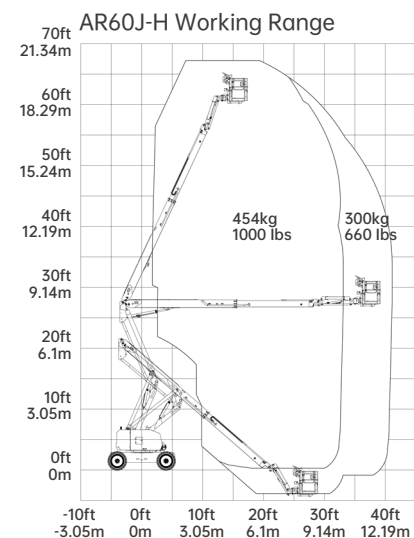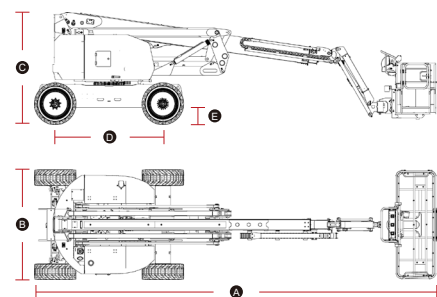

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.