


DIESEL POWERED




SPECIFICATIONS

MODELS	H1056		H1256	
Measurements	Imperial	Metric	Imperial	Metric
Max. Lifting Height	56'1"	17.1 m	56'1"	17.1 m
Max. Outreach	42'	12.8 m	42'	12.8 m
🅐 Overall Length	21'7"	6.57 m	21'7"	6.57 m
🅑 Overall Width	7'11"	2.41 m	7'11"	2.41 m
🅒 Overall Height	8'10"	2.7 m	8'10"	2.7 m
🅓 Wheelbase	11'6"	3.5 m	11'6"	3.5 m
Ground Clearance	1'5"	0.42 m	1'4"	0.4 m
PRODUCTIVITY				
Max. Capacity	10,000 lbs	4,535 kg	12,000 lbs	5,443 kg
Gradeability-Unladen	50%		50%	
Min. Turning Radius	≤14'1"	≤4.3 m	≤14'1"	≤4.3 m
Tilt Angle	±10°		±10°	
Drive / Steering Mode	4 Wheel Drive / 4 Wheel Steer		4 Wheel Drive / 4 Wheel Steer	
Primary Boom Ascending Time	15-25 s		15-25 s	
Primary Boom DescendingTime	10-20 s		10-20 s	
Boom Extending Time	20-30 s		20-30 s	
Boom Retracting Time	15-25 s		15-25 s	
Forward - First Gear Travel Speed	3.1 mph	5 km/h	3.1 mph	5 km/h
Forward - Second Gear Travel Speed	5.6 mph	9 km/h	5.6 mph	9 km/h
Forward - Third Gear Travel Speed	9.9 mph	16 km/h	11.8 mph	19 km/h
Forward - Fourth Gear Travel Speed	15.5 mph	25 km/h	15.5 mph	25 km/h
Backward - First Gear Travel Speed	3.1 mph	5 km/h	3.1 mph	5 km/h
Backward - Second Gear Travel Speed	5.6 mph	9 km/h	5.6 mph	9 km/h
Backward - Third Gear Travel Speed	9.9 mph	16 km/h	11.8 mph	19 km/h
Braking	Multi-disc wet brake		Multi-disc wet brake	
Tire Type	Foam-filled tires		Foam-filled tires	
Tire Models	400/75-28		400/75-28	
ENGINE				
Manufacturer	Cummins		Cummins	
Rated Power	120.7hp / 73.8hp	90kW / 55 kW	120.7 hp	90 kW
Max. Torque	295 lb.ft	400 N.m	368.8 lb.ft	500 N.m
Displacement	231.9 cu.in	3,800 ml	231.9 cu.in	3,800 ml
Fuel Tank Capacity	38.3 gal	145 L	38.3 gal	145 L
HYDRAULIC SYSTEM				
Working pump displacement	63 ml/r		63 ml/r	
Hydraulic Oil Capacity	37.5 gal	142 L	37.5 gal	142 L
WEIGHT				
Machine Weight	33,730 lbs	15,300 kg	34,833 lbs	15,800 kg

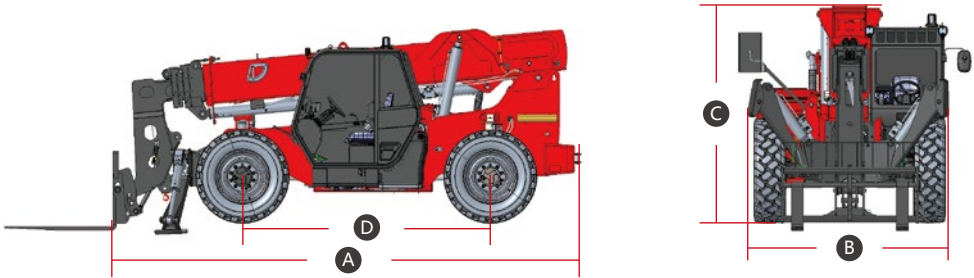


PRODUCT RANGE OF ATTACHMENTS

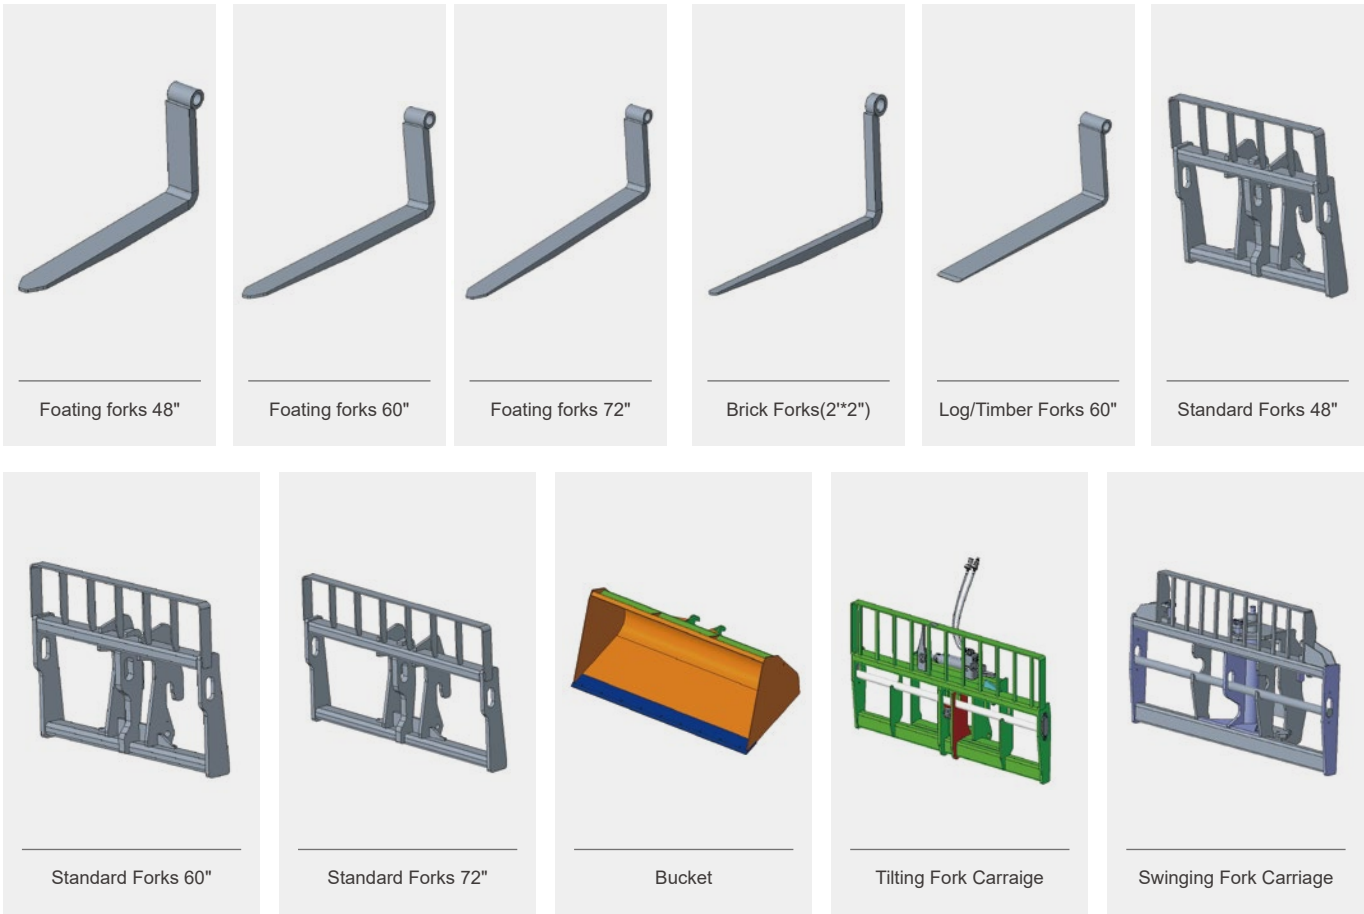

LOAD CHARTS

H1056

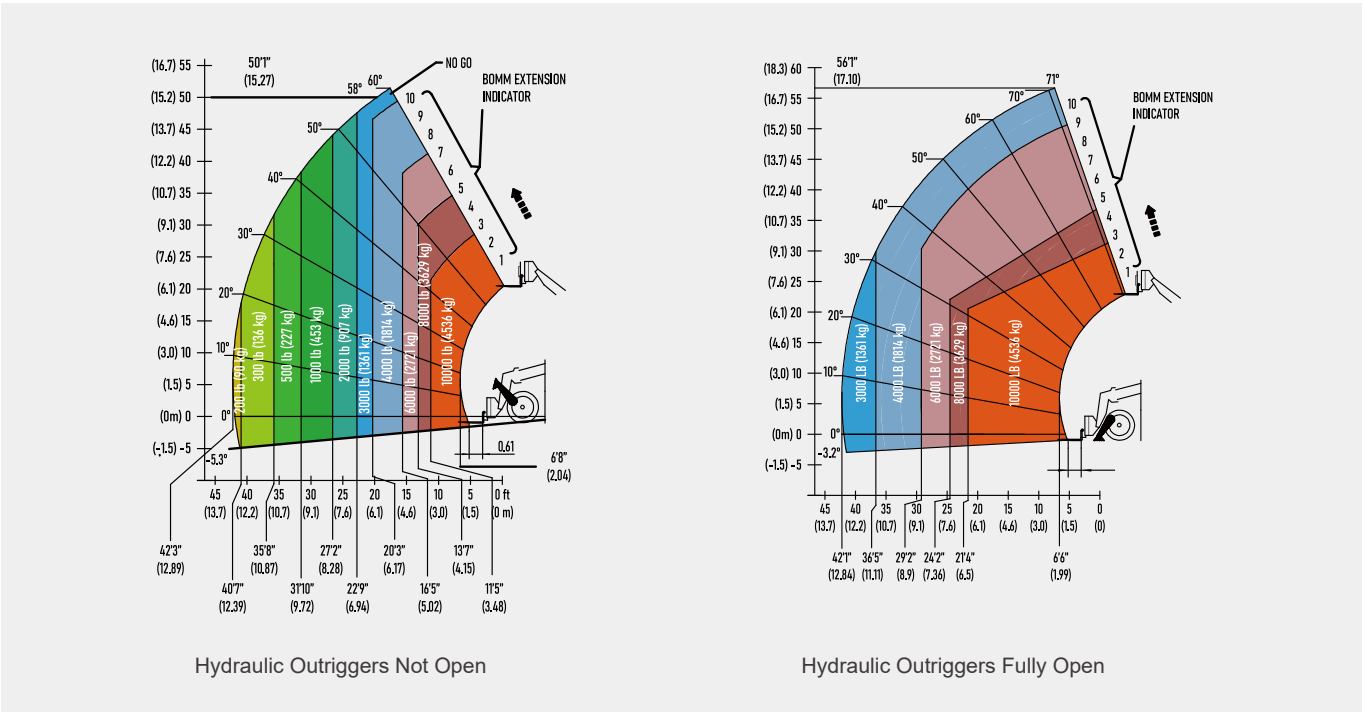

H1256

