

LGMG

H5519E


TELEHANDLER




LGMG TELEHANDLER

SPECIFICATIONS

MODELS	H5519E	
Measurements	Imperial	Metric
Ⓐ Max. Lifting Height	19'6"	5.94m
Max. Outreach	11'6"	3.51m
Ⓑ Overall Length	13'1"	3.99m
Ⓒ Overall Width	6'1"	1.86m
Ⓓ Overall Height	6'6"	1.97m
Ⓔ Wheelbase	7'7"	2.3m
Ground Clearance	11"	0.29m
PRODUCTIVITY		
Max. Capacity	5,500 lbs	2,495kg
Gradeability-Unladen	35%	
Min. Turning Radius	11'	3.36m
Tilt Angle	±5°	
Drive /Steering Mode	4 Wheel Drive / 4 Wheel Steer	
Primary Boom Ascending Time	12±1s	
Primary Boom DescendingTime	8±1s	
Boom Extending Time	8.5±1s	
Boom Retracting Time	5±1s	
Forward - Travel Speed	10mph	16km/h
Backward - Travel Speed	10mph	16km/h
Service Brake	Multi-disc Wet Brake of Front Axle	
Standard Tyres	12-16.5	
BATTERY		
Battery Technology	Lithium Battery	
Battery Nominal Voltage	76.8V	
Battery Capacity	375Ah	
Electric Engine Power Rating	14kW	
Travel Motor Power Rating	12.3kW	
ELECTRIC CIRCUIT		
12V Battery capacity	120Ah	
HYDRAULIC SYSTEM		
Working pump displacement	56 l/min	
Hydraulic Oil Capacity	17.2 gal	65L
WEIGHT		
Machine Weight	11,244 lbs	5,100kg

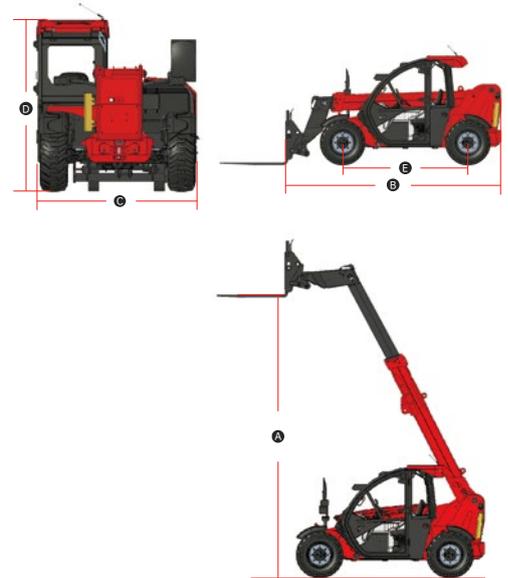

LOAD CHART

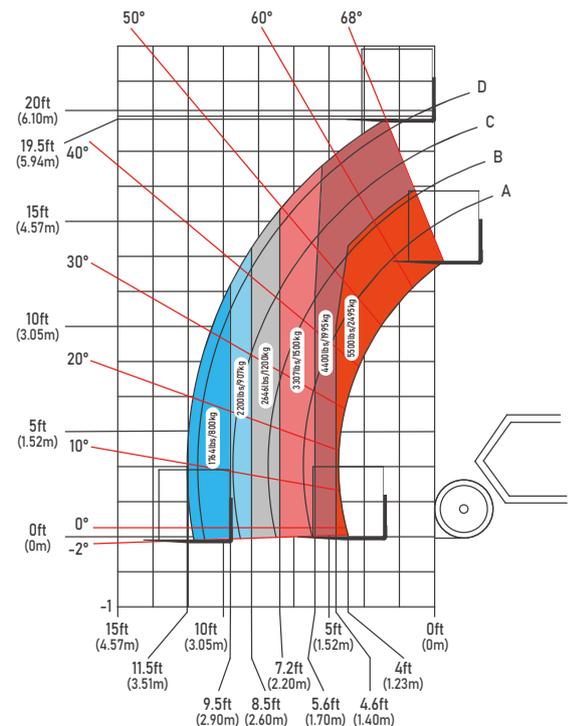

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

LGMG Machinery Canada Ltd.

Address: 76 Sinclair Blvd, Brantford, Canada

Email: sales@lgmg.ca Tel: +1 (800) 420-5999

www.lgmg.ca



RELIABILITY IN ACTION