

LGMG

H5519


TELEHANDLER




LGMG TELEHANDLER

SPECIFICATIONS

MODELS	H5519	
Measurements	Imperial	Metric
A Max. Lifting Height	19'6"	5.94 m
Max. Outreach	11'6"	3.51 m
B Overall Length	13'1"	3.99 m
C Overall Width	6'1"	1.86 m
D Overall Height	6'6"	1.97 m
E Wheelbase	7'7"	2.3 m
Ground Clearance	1'1"	0.33 m
PRODUCTIVITY		
Max. Capacity	5,512 lbs	2500 kg
Gradeability-Unladen	45%	
Min. Turning Radius	11'	3.36 m
Tilt Angle	±5°	
Drive / Steering Mode	4 Wheel Drive / 4 Wheel Steer	
Primary Boom Ascending Time	9 s	
Primary Boom DescendingTime	6.5 s	
Boom Extending Time	6 s	
Boom Retracting Time	4 s	
Forward - First Gear Travel Speed	6.2±1.2 mph	10±2 km/h
Forward - Second Gear Travel Speed	15.5 mph	24.9 km/h
Backward - First Gear Travel Speed	6.2±1.2 mph	10±2 km/h
Backward - Second Gear Travel Speed	15.5 mph	24.9 km/h
Braking	Multi-disc wet brake	
Standard Tyres	12-16.5-12-TL	
ENGINE		
Manufacturer	Kubota	
Rated Power	73.2 hp	54.6 kW
Max. Torque	213.4 lb.ft	289.3 N.m
Displacement	203.3 cu.in	3,331 ml
Fuel Tank Capacity	16.6 gal	63 L
HYDRAULIC SYSTEM		
Working pump displacement	35 ml/r	
Hydraulic Oil Capacity	19.8 gal	75 L
WEIGHT		
Machine Weight	11,133 lbs	5,050 kg

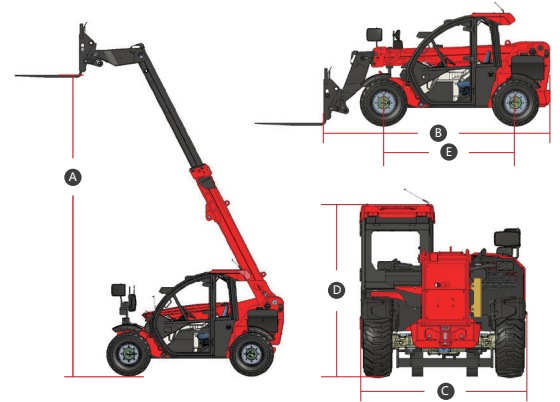

ROUGH TERRAIN LOAD CHART

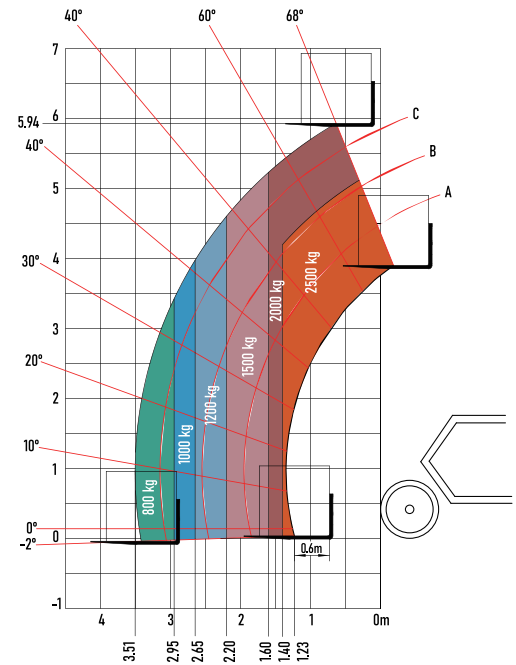

Please contact LGMG or a local dealer for more details.
LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China

Email: sales@lgmg.com.cn Tel: +86 531 6787 9283

www.lgmglifts.com



RELIABILITY IN ACTION