



S3232E

SCISSOR LIFT




Scissor Lift

SCISSOR LIFTS

Specifications

MODELS		S3232E	
Measurements		Metric	Imperial
Work Height Max.		12m/9m (in/out)	39'4"/29'6" (in/out)
A Platform Height-Raised		10m/7m (in/out)	32'10"/23' (in/out)
B Platform Length		2.26m	7'5"
C Extension Deck		0.9m	2'11"
D Platform Length With Extension Deck		3.16m	10'4"
E Platform Width		0.79m	2'7"
F Overall Length		2.48m	8'2"
G Overall Width		0.83m	2'9"
H Overall Height-Guardrails Up		2.45m	8'
Guardrail Height		1.1m	3'7"
I Wheelbase		1.87m	6'2"
Ground Clearance(Stowed/Raised)		100/20mm	4"/ 0.8"
Productivity			
Max. Platform Occupants (in/out)		2 (in) / 1(out)	
Platform Capacity		250kg	551 lbs
Platform Capacity-Extension Deck		120kg	265 lbs
Drive Height		Full Height	
Gradeability-Stowed		25%	
Min. Turning Radius		2.5m	8'2"
Raise/Lower Speed		58s / 50s	
Maximum allowable working angle		Side 1.5°; forward/back 3°	
Drive Mode		2x2	
Tire Type		Solid Non-marking	
Power			
Lead-acid Battery		24V(4x6V), 220Ah	
Weight			
Machine Weight		3,200kg	7,055 lbs

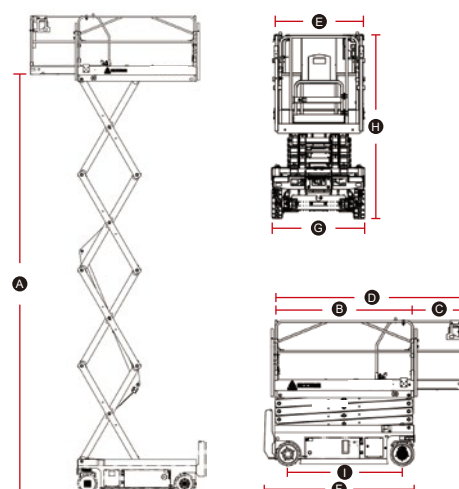

STANDARD FEATURES

- Lead-acid maintenance-free battery
- Proportional controls
- Foldable guardrail
- Emergency descent
- Intelligent diagnostic system
- Automatic braking system
- Over-tilt protection system
- Charging protection system
- Standard transport forklift Holes
- Solid Non-marking
- Trackunit ready
- Leak containment

OPTIONS

- AC power to platform
- Lithium battery
- Surrounding warning lights

ANSI A92.20, CSA B354.6

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

This brochure comes into effect in August, 2026.