



S3232E

SCISSOR LIFT




Scissor Lift

Scissor Lift

Specifications

MODELS	S3232E	
Measurements	Metric	Imperial
Work Height Max.	12m/9m (in/out)	39'4"/29'6" (in/out)
A Platform Height-Raised	10m/7m (in/out)	32'10"/23' (in/out)
B Platform Length	2.26m	7'5"
C Extension Deck	0.9m	2'11"
D Platform Length With Extension Deck	3.16m	10'4"
E Platform Width	0.79m	2'7"
F Overall Length	2.48m	8'2"
G Overall Width	0.83m	2'9"
H Overall Height-Guardrails Up	2.45m	8'
Guardrail Height	1.1m	3'7"
I Wheelbase	1.87m	6'2"
Ground Clearance(Stowed/Raised)	100/20mm	4"/ 0.8"
Productivity		
Max. Platform Occupants (in/out)	2 (in) / 1(out)	
Platform Capacity	250kg	551 lbs
Platform Capacity-Extension Deck	120kg	265 lbs
Drive Height	Full Height	
Gradeability-Stowed	25%	
Min. Turning Radius	2.5m	8'2"
Raise/Lower Speed	58s / 50s	
Maximum allowable working angle	Side 1.5°; forward/back 3°	
Drive Mode	4x2	
Tire Type	Solid Non-marking	
Power		
Lead-acid Battery	24V(4x6V), 220Ah	
Weight		
Machine Weight	3,200kg	7,055 lbs

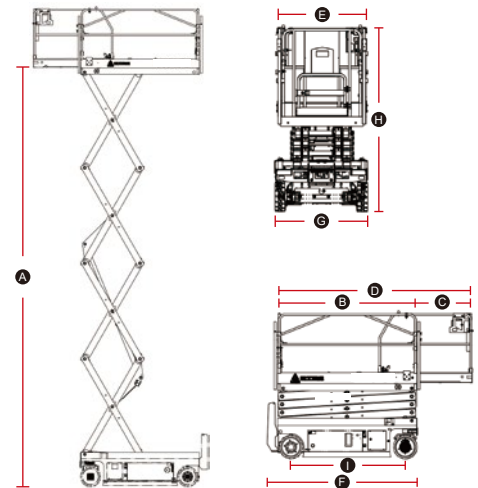

STANDARD FEATURES

- Lead-acid maintenance-free battery
- Proportional controls
- Foldable guardrail
- Emergency descent
- Intelligent diagnostic system
- Automatic braking system
- Over-tilt protection system
- Charging protection system
- Standard transport forklift Holes
- Solid Non-marking
- Trackunit ready
- Leak containment

OPTIONS

- AC power to platform
- Lithium battery
- Surrounding warning lights

ANSI A92.20, CSA B354.6

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

This brochure comes into effect in August, 2026.