

LGMG

SR3390D

DIESEL RT SCISSOR LIFT

- Larger work platform with high capacity offers great productivity.
- Powerful diesel engine, oscillating axels and four-wheel drive provide better performance on most rough terrain job sites.
- The overload system and motion alarm help the operator to complete the job in a much safer way.
- Pull-out engine tray for easy access and maintenance.
- On-board self-diagnosis system makes it easier for quick troubleshooting.



LGMG Diesel RT Scissor Lift

SPECIFICATIONS

MODELS	SR3390D (SR1023D)	
Measurements	Imperial	Metric
Work Height Max.	39'4"	12m
A Platform Height - Raised	32'10"	10m
B Platform Height - Stowed	5'2"	1.58m
C Platform Length	13'1"/15'9"	3.98/4.81m
D Platform Width	6'	1.83m
E Overall Length	16'1"	4.9m
F Overall Width	7'7"	2.3m
G Overall Height - Rails up	9'	2.74m
Overall Height - Rails down	6'9"	2.06m
H Extension Deck	4'9"/3'9"	1.45/1.14m
I Wheelbase	9'4"	2.85m
Ground Clearance-Center	9"	0.23m

PRODUCTIVITY

Max. Platform Occupancy	7(in) / 7(out)	
Platform Capacity	2,430 lbs	1,100kg
Platform Capacity - Extension	510 lbs	230kg
Drive Height	Full Height	
Gradeability - Stowed	40%	
Min. Turning Radius	17'6"	5.33m
Raise/Lower Speed	45 / 45s	
Brakes	Four-wheel brake	
Drive Mode	4x4	
Tires Type	Solid	
Tires Size	33"x11"	835x290mm
Ground Pressure, Tyres	128.7 psi	887.37 kPa

POWER

Power Source	Kubota 36kW/48.3hp Deutz 36.4kW/48.8hp	
Fuel Tank Capacity	26.4gal	100L

HYDRAULIC SYSTEM

Hydraulic Oil Volume	37gal	140L
----------------------	-------	------

WEIGHT


Machine Weight (13'1")	15,170 lbs	6,880kg
Machine Weight (15'9")	15,400 lbs	6,980kg

STANDARD FEATURES

Proportional control	Tilt alarm with lift cut-out
Foldable guardrail	Overload sensing system
Emergency stop device	Descent alarm with flashing beacon
Manual brake release	All motions alarm
Emergency descent	Intelligent diagnostic system
Oscillating axle	Auto-leveling outriggers
Self-lock entry gate	Solid tires

OPTIONAL

Telematics	Solid non-marking tires
AC power to platform	Foam-filled tires
Cold weather package	Foam-filled non-marking tires
Biodegradable hydraulic oil	

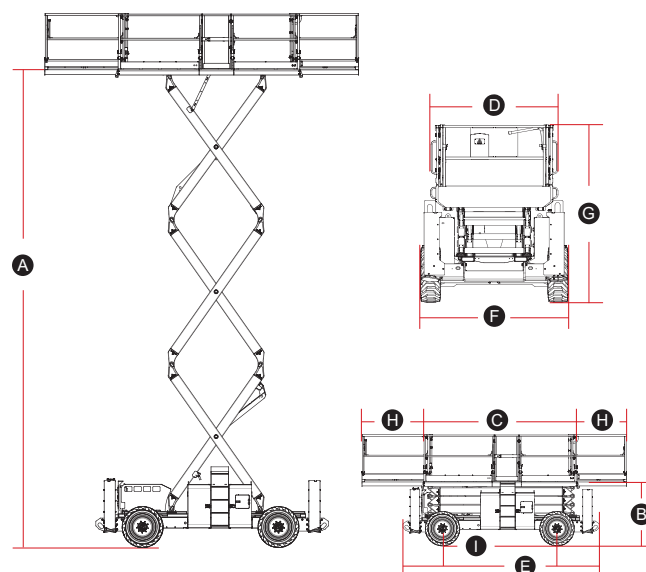

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States
Email: sales@lmgna.com Tel: +1 833 288 5464

www.lmgna.com



RELIABILITY IN ACTION