

LGMG

T65JE

TELESCOPIC BOOM LIFT



LGMG's new electric telescopic boom aerial work platform is equipped with a lithium battery, which has the advantages of low noise and zero emissions. The maximum working height of the platform ranges from 71'6" to 97'9" (21.8/29.8m). Platform accommodates up to 3 people and 992/661 lbs (450/300kg) dual capacity design for increased work efficiency. Excellent performance in driving performance, stability and operating precision, suitable for various harsh working environments.



LGMG Green Tech Telescopic Boom Lift

SPECIFICATIONS

MODELS	T65JE (T20JE)	
Measurements	Imperial	Metric
Work Height Max.	71'6"	21.8m
Platform Height	65'	19.8m
Horizontal Outreach Max.	54'6"	16.6m
Platform Length	8'	2.44m
Platform Width	2'11"	0.9m
A Stowed Length	33'6"	10.2m
Length-Transport (jib tucked)	27'3"	8.3m
B Overall Width	8'2"	2.5m
C Stowed Height	9'1"	2.77m
Height-Transport	9'6"	2.89m
D Wheelbase	8'3"	2.51m
E Ground Clearance	1'4"	0.4m

PRODUCTIVITY		
Max. Platform Occupants	2 (unrestricted) / 3 (restricted)	
Platform Capacity (unrestricted)	661 lbs	300kg
Platform Capacity (restricted)	992 lbs	450kg
Turntable Rotation	360°Continuous	
Drive Speed-Stowed	3.1mph	5km/h
Drive Speed-Raised	0.5mph	0.8km/h
Gradeability	45%	45%
Max. Wind Speed	28mph	12.5m/s
Turning Radius-Inside	6'3"	1.9m
Turning Radius-Outside	12'10"	3.9m
Max.Slope	5°/5°	5°/5°
Tire Type	RT Foam-filled	
Tire Size	355/55D625	355/55D625
Ground Pressure, Tyres	97.2 psi	670 kPa



POWER	
Power Source	80V 375Ah

HYDRAULIC SYSTEM		
Hydraulic Oil Volume	26.4gal	100L

WEIGHT		
Machine Weight	26,455 lbs	12,000kg

STANDARD FEATURES	
Proportional control	Emergency stop button
Horn/Hour meter	Auto-leveling platform
Descent alarm	Anti-collision protection
Flashing beacons	Over-tilt protection system
Cylinder bellows	Platform control cover
Platform tool box	Overload sensing system
Oscillating axle	Intelligent diagnostic system
Telematics connector	RT Foam-filled tires

OPTIONAL	
Telematics	Solid tires
Glazier kit	Solid non-marking tires
Auxiliary rail	Foam-filled tires
AC power to platform	Foam-filled non-marking tires
Half-height mesh platform	Biodegradable hydraulic oil

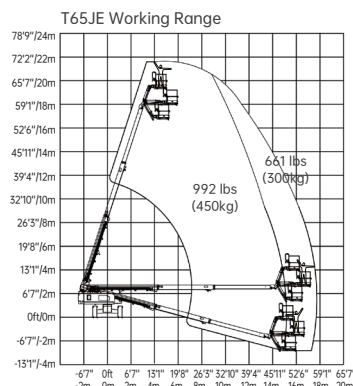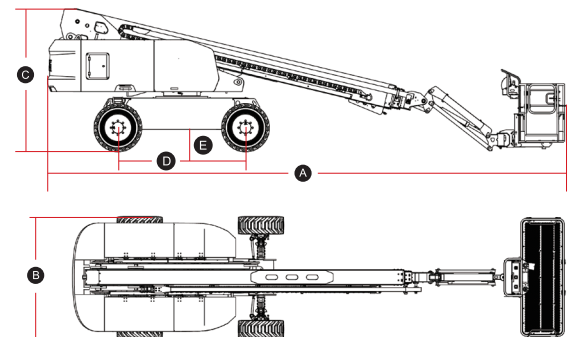

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States
Email: sales@lmgna.com Tel: +1 833 288 5464

www.lmgna.com



RELIABILITY IN ACTION